



**Fales Grand**

*Transforming  
Vision into  
Reality...*



HEAD OFFICE (U.A.E.):  
FALES GRAND GENERAL TRADING L.L.C.  
REGIONAL OFFICE (P.R.C.):  
QINGDAO FALES GRAND INT'L CO.,LTD.  
[www.falesgrand.com](http://www.falesgrand.com)  
[sales@falesgrand.com](mailto:sales@falesgrand.com)

Version 2025



PCR/LTR/TBR/OTR

TIRE CATALOGUE







## Company Profile

Fales Grand one of the leading international trading companies based in Dubai - U.A.E with its wholly owned foreign subsidiaries in China, Iraq and Saudi Arabia. Being involved in the Tire, Tube and Automotive Battery business for last 25 years, Fales Grand Company earned wealth of experience to offer.

Ever since the company was established, we always have been going forward with positive and challenging mind to bring in all best products of China, South Korea to region such as Asia, Middle East, Africa, and European countries.

Our mission is "Transforming Vision into Reality" and to achieve this, we aim to provide quality products, strive to keep ourselves up-to-date in technologies and resolutions that meet all generation requirements. At the pinnacle our priority is to foster our customer's profitability by serving private OEM brands, exclusive selling-rights at very competitive prices, full range of point-of-sale materials. Developing a Corporate Culture that enhances the value of our business, expand opportunities for the growth of an objective to provide easy access to our products and services round the clock. For more information please visit our website [www.falesgrand.com](http://www.falesgrand.com).

**Fales Grand**



*Transforming  
Vision into  
Reality...*



# Content

## PASSENGER CAR RADIAL & LIGHT TRUCK RADIAL

Cruise	3
Drift	4
Enduring	5
Energize	6
Stellar	7
DS01	8
Avenue / Delta	9
Span / Trail	10
Orbit / Rough	11
Agile / Elevate	12
Brisk / Voltage	13
Vison / Astra	14
Envoy / Maxim	15
Premier / Alto	16
Grip / Brawn	17
Raptor / Rapid	18
Flash / Pantherex	19
Force 2X / Force	20
Capacity / Navigation	22
Dynamic / Dynamic Plus	23
Powermax / Robust	24
Strength / Active	25
DS809 / DS801	26
CS118 / CS130	27
Cosmo / Performer	28
Rough SR / Roger	29
Trekking / Zeal	30
Zeal Plus / Magnetic	31
Orion / CS700	32
CS702 / CS706	33
CS7088 / CS7188	34
Gear / Delight	35

## TRUCK AND BUS RADIAL

CS504 / CS520	37
CS555 / CS580	38
CS716 / CS717	39
CS719 / CS718	40
CS770 / CS760	41
DS706 / CS820	42
CS850 / CS888	43
CS900 / CS878	44
CS26 / CS625	45
CS582 / CS910	46
Radiant / Vega	47
Baron / Turbo	48
CSE608 / CSE908	49
CSE162 / CSE601	50
CSE572 / CSE602	51
CSE605 / CSE610	52

## BIAS OTR

L-3 NEW / G2	54
E-3/L-3	55
SH-278 / R4	56
R4-1 / L2	57
SH-308 / SH-338	58
R1	59
SH-358 / SH-378	60
L5 / F2	61
F3 / SH628	62
L4 / CS620+	63

## RADIAL OTR

E-3/L-3 / L3	65
--------------	----





# ***PASSENGER CAR RADIAL***





# Cruise



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
175/65R14	Cruise	82	H	5J	475	300	177	584	8.0
185/60R15	Cruise	84	H	5 1/2J	500	300	189	603	8.0
185/65R15	Cruise	88	H	5 1/2J	560	300	189	621	8.0
195/60R15	Cruise	88	V	6J	560	300	201	615	8.0
195/65R15	Cruise	91	V	6J	615	300	201	635	7.5
205/60R15	Cruise	91	H	6J	615	300	209	627	8.0
205/65R15	Cruise	94	V	6J	670	300	209	647	8.0
215/70R15	Cruise	98	T	6 1/2J	750	300	221	683	8.2
215/60R16	Cruise	95	V	6 1/2J	690	300	221	664	8.0
225/60R16	Cruise	98	V	6 1/2J	750	300	228	676	8.0







# Drift



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
205/50R17	Drift	93	W	6 1/2J	650	340	214	638	8.0
215/45R17	Drift	91	W	7J	615	340	213	626	8.0
215/50R17	Drift	95	W	7J	690	340	226	648	8.0
215/55R17	Drift	94	W	7J	670	300	226	668	8.0
225/45R17	Drift	94	W	7 1/2J	670	340	225	634	8.0
225/40R18	Drift	92	W	8J	630	340	230	637	8.0
225/45R18	Drift	95	W	7 1/2J	690	340	225	659	8.0
235/45R18	Drift	98	W	8J	750	340	236	669	8.0
235/55R18	Drift	104	V	7 1/2J	900	340	245	715	8.0
245/45R18	Drift	100	W	8J	800	340	243	677	8.0
235/55R19	Drift	105	V	7 1/2J	925	340	245	741	8.0





# Enduring



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
145/70R12	Enduring	69	T	4.50B	325	300	150	509	6.5
155/65R13	Enduring	73	T	4.50B	365	300	157	532	7.5
155/70R13	Enduring	75	T	4.50B	387	300	157	548	7.5
165/65R13	Enduring	77	T	5.00B	412	300	170	544	7.5
165/70R13	Enduring	79	H	5.00B	437	300	170	562	7.5
165/80R13	Enduring	83	T	4.50B	487	300	165	594	7.5
175/60R13	Enduring	77	T	5J	412	300	177	540	7.5
175/70R13	Enduring	82	T	5.00B	475	300	177	576	7.5
185/70R13	Enduring	86	T	5.50B	530	300	189	590	8.0
165/70R14	Enduring	81	T	5J	462	300	170	588	7.5
175/70R14	Enduring	84	T	5J	500	300	177	602	8.0
185/60R14	Enduring	82	H	5 1/2J	475	300	189	578	7.5
185/65R14	Enduring	86	T	5 1/2J	530	300	189	596	7.5
185/70R14	Enduring	88	T	5 1/2J	560	300	189	616	8.0
195/70R14	Enduring	91	T	6J	615	300	201	630	8.0
205/60R14	Enduring	88	T	6J	560	300	209	602	7.5
205/70R15	Enduring	96	T	6J	710	300	209	669	8.0





# Energize



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
165/60R14	Energize	75	H	5J	387	300	170	554	7.2
165/65R14	Energize	79	T	5J	437	300	170	570	7.2
185/70R14	Energize	88	H	5 1/2J	560	300	189	616	8.0
195/55R15	Energize	85	V	6J	515	300	201	595	8.0
195/60R15	Energize	88	H	6J	560	300	201	615	8.0
195/65R15	Energize	91	V	6J	615	300	201	635	8.0
205/65R15	Energize	94	V	6J	670	300	209	647	8.5
225/60R15	Energize	96	V	6 1/2J	710	300	228	651	8.0
195/50R16	Energize	84	V	6J	500	300	201	602	8.0
205/55R16	Energize	91	V	6 1/2J	615	300	214	632	8.0
205/60R16	Energize	92	V	6J	630	300	209	652	8.0
205/65R16	Energize	95	H	6J	690	300	209	672	8.0
215/65R16	Energize	98	H	6 1/2J	750	300	221	686	8.0
235/60R16	Energize	100	H	7J	800	300	240	688	8.0
215/55R17	Energize	94	V	7J	670	300	226	668	8.0
225/55R17	Energize	101	H	7J	825	340	233	680	8.0
225/60R17	Energize	99	H	6 1/2J	775	300	228	702	8.0
225/65R17	Energize	102	H	6 1/2J	850	300	228	724	8.0
235/65R17	Energize	104	H	7J	900	300	240	738	8.0



# Stellar



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
175/70R14	Stellar	84	T	5J	500	300	177	602	7.2
185/70R14	Stellar	88	T	5 1/2J	560	300	189	616	7.2
195/70R14	Stellar	91	T	6J	615	300	201	630	7.5
205/60R14	Stellar	88	H	6J	560	300	209	602	7.5
185/65R15	Stellar	88	H	5 1/2J	560	300	189	621	7.2
195/60R15	Stellar	88	V	6J	560	300	201	615	7.5
195/65R15	Stellar	91	V	6J	615	300	201	635	7.5
205/60R15	Stellar	91	H	6J	615	300	209	627	7.5
205/65R15	Stellar	94	V	6J	670	300	209	647	7.5
205/55R16	Stellar	94	W	6 1/2J	670	350	214	632	7.5
205/60R16	Stellar	92	V	6J	630	300	209	652	7.5
205/65R16	Stellar	94	V	6J	690	300	209	672	7.5
215/60R16	Stellar	99	V	6 1/2J	775	350	221	664	7.5
215/65R16	Stellar	98	V	6 1/2J	750	300	221	686	7.5
215/55R17	Stellar	98	W	7J	750	350	226	668	7.5





DS01



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
215/75R15	DS01	100	T	6J	800	300	216	703	8.7
225/70R16	DS01	103	T	6 1/2J	875	300	228	722	8.7
265/70R16	DS01	112	H	8J	1120	300	272	778	8.7
225/60R17	DS01	99	H	6 1/2J	775	300	228	702	8.4
265/70R17	DS01	115	H	8J	1215	300	272	804	8.7
235/60R18	DS01	107	H	7J	975	340	240	739	8.4
245/45R19	DS01	98	H	8J	750	300	243	703	8.4





# Avenue



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
235/75R15	Avenue	105	T	6 1/2J	925	300	235	733	8.2



# Delta



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
245/45ZR20	Delta	103	W	8J	875	340	243	728	8.0
265/50ZR20	Delta	111	W	8 1/2J	1090	340	277	774	8.0
285/50ZR20	Delta	116	W	9J	1250	340	297	794	8.0





# Span



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
225/65R17	Span	102	H	6 1/2J	850	300	228	724	8.0
235/65R17	Span	104	H	7J	900	300	240	738	8.0
225/60R18	Span	100	H	6 1/2J	800	300	228	727	8.0



# Trail



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
215/70R16	Trail	100	H	6 1/2J	800	300	221	708	8.0



# Orbit



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
175/70R13	Orbit	82	T	5B	475	300	177	576	7.0
185/70R13	Orbit	86	T	5 1/2B	530	300	189	590	6.5
175/70R14	Orbit	84	T	5J	500	300	177	602	7.0
185/65R15	Orbit	88	H	5 1/2J	560	300	189	621	7.0
195/65R15	Orbit	91	H	6J	615	300	201	635	7.0
205/55R16	Orbit	91	H	6 1/2J	615	300	214	632	7.0
205/60R16	Orbit	92	H	6J	630	300	209	652	7.5
215/60R16	Orbit	99	H	6 1/2J	775	340	221	664	7.0



# Rough



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
175/65R14	Rough	82	T	5J	475	300	177	584	7.7
185/65R14	Rough	86	T	5 1/2J	530	300	189	596	7.0
185/70R14	Rough	88	T	5 1/2J	560	300	189	616	7.0
195/70R14	Rough	91	T	6J	615	300	201	630	7.0
195/60R15	Rough	88	H	6J	560	300	201	615	7.7
205/65R15	Rough	94	H	6J	670	300	209	647	7.0
225/45ZR17	Rough	94	W	7 1/2J	670	340	225	634	7.0





Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
195/60R15	Agile	88	H	6J	560	300	201	615	7.2



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
265/65R17	Elevate	112	T	8J	1120	300	272	776	8.0
265/60R18	Elevate	110	H	8J	1060	300	272	775	8.0
265/65R18	Elevate	114	T	8J	1180	300	272	801	8.0
285/60R18	Elevate	116	H	8 1/2J	1250	300	292	799	8.0
235/55R19	Elevate	105	V	7 1/2J	925	340	245	741	8.0
275/40ZR20	Elevate	106	W	9 1/2J	950	340	278	728	8.0





# Brisk



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
205/55R16	Brisk	91	V	6 1/2J	615	300	214	632	7.8
205/65R16	Brisk	95	H	6J	690	300	209	672	8.0
215/55ZR17	Brisk	94	W	7J	750	340	226	668	8.0



# Voltage



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
255/70R16	Voltage	111	T	7 1/2J	1090	300	260	764	8.5





# Vision



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
165/70R13LT	Vision	88/85	S	5.00B	560/515	450	170	562	8.5



# Astra



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
255/70R15C	Astra	113/110	S	7 1/2J	1150/1060	450	260	739	8.0
205R16C	Astra	110/108	R	6J	1060/1000	450	208	736	9.5
265/70R16	Astra	112	T	8J	1120	300	272	778	8.0
265/65R17	Astra	112	S	8J	1120	300	272	776	8.3
265/60R18	Astra	110	H	8J	1060	300	272	775	8.0
285/60R18	Astra	116	T	8 1/2J	1250	300	292	799	8.0





# Envoy



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
205/45R16	Envoy	87	W	7J	545	340	206	590	8.0
205/45R17	Envoy	88	W	7J	560	340	206	616	8.2



# Maxim



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
235/70R16	Maxim	106	H	7J	950	300	240	736	9.3
245/70R16	Maxim	111	H	7J	1090	340	248	750	9.3
265/70R16	Maxim	112	T	8J	1120	300	272	778	9.3
265/65R17	Maxim	112	H	8J	1120	300	272	776	9.3
265/70R17	Maxim	115	H	8J	1215	300	272	804	9.3
235/60R18	Maxim	107	H	7J	975	340	240	739	9.3
245/60R18	Maxim	105	H	7J	925	300	248	751	9.3
265/60R18	Maxim	114	H	8J	1180	340	272	775	9.3





# Premier



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
205/75R14	Premier	95	S	5 1/2J	690	300	203	664	7.8
215/75R15	Premier	100	S	6J	800	300	216	703	7.8



# Alto



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
285/45ZR22	Alto	114	Y	9 1/2J	1180	340	285	815	8.0





# Grip



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
265/65R18	Grip	114	H	8J	1180	300	272	801	7.6
285/50R20	Grip	116	V XL	9J	1250	340	297	794	7.6



# Brawn



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
185/65R14	Brawn	86	H	5 1/2J	530	300	189	596	7.2
185/70R14	Brawn	88	T	5 1/2J	560	300	189	616	7.2
195/70R14	Brawn	91	T	6J	615	300	201	630	7.2
185/65R15	Brawn	88	H	5 1/2J	560	300	189	621	7.5
195/65R15	Brawn	91	H	6J	615	300	201	635	7.5
205/65R15	Brawn	94	H	6J	615	300	209	647	7.2
205/60R16	Brawn	92	V	6J	630	300	209	652	7.5
215/60R16	Brawn	95	H	6 1/2J	690	300	221	664	7.5





# Raptor



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
31X10.50R15LT W	Raptor	109	Q	8 2/1J	1030	350	268	775	13.5
LT235/85R16 W	Raptor	120/116	Q	6 2/1J	1380/1260	550	235	806	13.0



# Rapid



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
31X10.50R15LT	Rapid	109	Q	8 1/2J	1030	350	268	775	10.0
215/75R15	Rapid	100	T	6J	800	300	216	703	8.5
215/70R16	Rapid	99	T	6 1/2J	775	300	221	708	8.5
225/70R16	Rapid	101	T	6 1/2J	825	300	228	722	8.5
LT235/85R16	Rapid	120/116	Q	6 1/2J	1380/1260	550	235	806	10.0





# Flash



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
225/55R18	Flash	98	H	7J	750	300	233	705	8.5



# Pantherex



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
165/65R13	Pantherex	77	T	5.00B	412	300	170	544	7.6
175/70R13	Pantherex	82	T	5.00B	475	300	177	576	7.8





Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
145/70R12TL	FORCE 2X	69	Q	4.5B	325	250	150	509	4.5



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
155/70R12TL	FORCE	73	Q	4.50B	365	250	157	523	5.0





# ***LIGHT TRUCK RADIAL***



# Capacity



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
215R15C	Capacity	112/110	S	6J	1120/1060	450	218	725	8.5

# Navigation



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
195R14C	Navigation	106/104	R	5 1/2J	950/900	450	198	666	9.0
195R14CW	Navigation	106/104	R	5 1/2J	950/900	450	198	666	9.0
195R15C	Navigation	106/104R	R	5 1/2J	950/900	450	196	691.4	9.2

# Dynamic



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
5.00R12LT	Dynamic	88/86	Q	3.5B	560/530	550	143	568	7.3

# Dynamic Plus



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
5.50R13LT	Dynamic Plus	97/95	P	4.00B	730/690	625	160	620	8.0



# Powermax



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
195/70R15C	Powermax	104/102	R	6J	900/850	450	201	655	9.0
225/70R15C	Powermax	112/110	R	6 1/2J	1120/1060	450	228	697	9.0
185R14C B	Powermax	102/100	R	5 1/2J	850/800	450	188	650	9.0
195R14C	Powermax	106/104	R	5 1/2J	950/900	450	198	666	9.0
195R15C	Powermax	106/104	R	5 1/2J	950/900	450	196	693	9.0
205R14C	Powermax	109/107	R	6J	1030/975	450	208	686	9.0

# Robust



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
255/70R15C	Robust	112/110	S	6.50J	1120/1060	375	258	734	9.0
205R16C	Robust	110/108	R	6J	1060/1000	450	310	732	9.0



# Strength



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
155R12	Strength	88/86	S	4.5B	560/530	450	157	553	7.5

# Active



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
205/70R15C	Active	106/104	S	6.00J	950	450	209	669	8.5





# DS809



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
5.00R12LT	DS809	P	88/86	3.50B	615/600	550	143	568	9.5



# DS801



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
5.50R12LT	DS801	P	92/90	4.00B	630/600	500	160	595	8.5




# CS118



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
6.50R16LT-10PR	CS118	107/102	L	5.50F	975	560	185	750	10.0
7.00R16LT-12PR TTF	CS118	115/110	M	5.50F	1215	670	200	775	10.0
7.00R16L-12PR TL	CS118	115/110	M	5.50F	1215	670	200	775	10.0
7.50R16LT-14PR TTF	CS118	122/118	L	6.00G	1500	770	215	805	10.5
7.50R16LT-14PR TL	CS118	122/118	L	6.00G	1500	770	215	805	10.5

# CS130

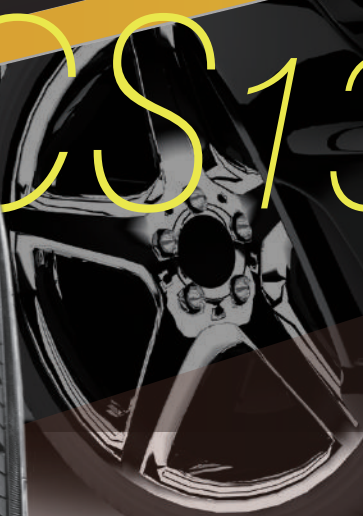

Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
6.50R16	CS130	107/102	N	5.50F	975	560	185	750	10.0





# Cosmo



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
205/70R15C	Cosmo	106/104	S	6J	950	450	209	669	8.5



# Performer



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
5.00R12	Performer	88/86	P	3.50B	560	550	143	568	8.7

# Rough SR



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
7.50R16LT	Rough SR	112/107	M	6.00G	1120	460	215	805	10.0

# Roger



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
5.50R12	Roger	92/90	p	3.50B	630	560	162	591	10.0



# Trekking



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
195R14LT	Trekking	105/103	Q	5 1/2J	925	450	196	668	8.7
195R15 LT	Trekking	106/104	Q	5 1/2J	950	450	196	693	8.7

# Zeal



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
5.00R12	Zeal	88/86	P	3.50B	560	550	143	568	10.0
5.50R13LT	Zeal	97/95	P	4.00B	560	460	160	620	9.7



# Zeal plus



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
5.00R12	Zeal Plus	88/86	P	3.50B	560	550	143	568	8.7

# Magnetic



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
195R14C	Magnetic	105/103	Q	5 1/2J	925	450	196	668	8.7

# Orion



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
195R15C	Orion	106/104	Q	5 1/2J	950	450	196	693	8.7

# CS700



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
6.50R15C	CS700	106/101	N	5.50F	950/825	560	185	730	8.0
6.50R16C	CS700	107/102	N	5.50F	975/850	560	185	750	8.2
7.00R16C	CS700	115/110	N	5.50F	1215/1060	670	200	775	8.2
7.50R16C	CS700	122/118	L	6.00G	1500/1320	770	215	805	9.5



# CS702



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
215/70R16C	CS702	106/102	R	6 1/2J	950/875	450	221	708	9.5
205R16C	CS702	110/108	Q	6J	1060/1000	450	206	732	9.8

# CS706



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
185R14C	CS706	102/100	S	5 1/2J	850/800	450	189	652	8.0
195R14C	CS706	105/103	S	5 1/2J	925/875	450	196	668	8.3
185R15C	CS706	103/102	Q	5 1/2J	875/850	450	189	677	8.0
195R15C	CS706	106/104	R	5 1/2J	950/900	450	196	693	8.3
205/70R15C	CS706	106/104	S	6J	950/900	450	209	669	8.3



# CS7088



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
5.00R12LT	CS7088	88/86	Q	3.50B	560/530	500	143	568	8.0

# CS7188



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
5.00R12LT	CS7188	88/86	Q	3.50B	560/530	500	143	568	7.8



# Gear



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
185R14C	Gear	102/100	Q	5 1/2J	850	450	189	652	8.7

# Delight



Size	Pattern	Load Index	Speed Rating	Standard Rim	Max.Load(kg)	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth (mm)
185R14C	Delight	102/100	R	5 1/2J	850	450	188	650	9.5



# CRYSTAL TIRE



TRUCK AND BUS RADIAL





# CS504



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
900R20	16	CS504	144/142	K	7.00	2800/2650	900/900	259	1019	15
1000R20	18	CS504	149/146	K	7.50	3250/3000	930/930	278	1054	15
1100R20	18	CS504	152/149	K	8.00	3550/3250	930/930	293	1085	17
1200R20	20	CS504	156/143	K	8.50	3750/3450	830/830	315	1125	17.5
11R22.5	16	CS504	148/145	M	8.25	3150/2900	850/850	279	1054	15
315/80R22.5	20	CS504	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	14.5

# CS520



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
12R22.5	18	CS520	152/149	M	9.00	3550/3250	930/930	302	1087	20
315/80R22.5	20	CS520	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	23



# CS5555



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
1100R20	18	CS555	152/149	K	8.00	3550/3250	930/930	293	1085	18

# CS580



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
315/80R22.5	20	CS580	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	16.5
1200R24	20	CS580	160/157	K	8.50	4500/4125	900/900	315	1125	15.5



# CS716



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
750R16LT	14	CS716	122/118	M	6.00G	1500/1320	770/770	215	805	13
825R16LT	16	CS716	128/124	M	6.50H	1800/1600	770/770	235	855	16
900R20	16	CS716	144/142	K	7.00	2800/2650	900/900	259	1019	15.5
1000R20	18	CS716	149/146	K	7.50	3250/3000	930/930	278	1054	16.5
1100R20	18	CS716	152/149	K	8.00	3550/3250	930/930	293	1085	17
1200R20	20	CS716	156/153	K	8.50	3750/3450	830/830	315	1125	17.5
1200R24	20	CS716	160/157	K	8.50	4500/4125	900/900	315	1125	16
11R22.5	16	CS716	148/145	M	8.25	3150/2900	850/850	279	1054	15.5
12R22.5	18	CS716	152/149	M	9.00	3550/3250	930/930	300	1085	16
13R22.5	20	CS716	156/152(154/151)	L(M)	9.75	4000/3550	860/860	320	1124	16.5
15R22.5	20	CS716	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	17.5

# CS717



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
1100R20	18	CS717	152/149	K	8.00	3550/3250	930/930	293	1085	17.5
1200R20	20	CS717	156/153	K	8.50	3750/3450	830/830	315	1125	18.5



# CS719



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
295/80R22.5	18	CS719	152/149	M	9.00	3550/3250	900/900	298	1044	15

# CS718



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
11.00R20	18	CS718	152/149	K	8.00	3550	930	286	1082	15



# CS770



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
12.00R24	20	CS770	160/157	K	8.50	4500/4125	900/900	315	1125	19.0

# CS760



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
12R22.5	18	CS760	152/149	M	9.00	3500/3250	930/930	300	1085	16.5
13R22.5	20	CS760	156/152(154/151)	L(M)	9.75	4000/3550	860/860	320	1124	17.0
315/80R22.5	20	CS760	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	14.5



# DS706



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
14.00R20	20	DS706	164/161	K	10.00	5000	790	375	1253	20.3

# CS820



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
315/80R22.5	20	CS820	156/152(154/151)	L(M)	9.00	4000/3550	860	312	1076	23.0
13R22.5	20	CS820	156/152(154/151)	L(M)	9.75	4000/3550	860	312	1124	20.0



# CS850



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
315/80R22.5	20	CS850	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	15.5

# CS888



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
12.00R24	20	CS888	160/157	K	8.50	4500	900/900	315	1125	20



# CS900



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
385/65R22.5	20	CS900	160	K	11.75	4500	900	389	1072	17

# CS878



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
315/80R22.5	20	CS878	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	15.5



# CS26



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
7.50R16	14	CS26	122/118	L	6.006	1500	770	210	802	12

# CS625



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
235/75R17.5	16	CS625	132/130	M	6.75	2000	775	233	797	12



# CS582



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
1200R24	20	CS582	160/157	K	8.50	4500/4125	900/900	315	1216	16

# CS910



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
385/65R22.5	20	CS910	160	K	11.75	4500	900	389	1072	15.5



# Radiant



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
215/75R17.5	18	Ratiant	135/133	J	6.00	1700	700	211	767	17
265/70R19.5	18	Ratiant	143/141	J	7.50	2500	775	262	867	13
285/70R19.5	18	Ratiant	150/148	J	8.25	3000	900	283	895	15

# Vega



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
205/75R17.5	16	Vega	125/123	M	6.00	1550	760	204	733	12



# Baron



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
8.5R17.5	14	Baron	124/122	L	6.00	1450	625	215	802	13.3

# Turbo



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
8.5R17.5	12	Turbo	121/120	L	6.00	1450	625	215	802	13.3
9.5R17.5	16	Turbo	129/127	L	6.75	1850	750	240	842	13.3
235/75R17.5	18	Turbo	143/141	J	6.75	2725	875	233	797	13



# CSE608



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
315/80R22.5	20	CSE608	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	18

# CSE908



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
315/80R22.5	20	CSE908	157/154	M	9.00	4125/3750	900/900	312	1076	15



# CSE162



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
315/80R22.5	20	CSE162	156/152	L(M)	9.00	4000/3550	860/860	312	1076	15

# CSE601



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
315/80R22.5	20	CSE601	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	14.5



# CSE572



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
315/80R22.5	20	CSE572	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	15

# CSE602



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
315/80R22.5	20	CSE602	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	14.5



# CSE605



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
315/80R22.5	20	CSE605	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	18

# CSE610



SIZE	PR	PATTERN	Load index	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
315/80R22.5	20	CSE610	156/152(154/151)	L(M)	9.00	4000/3550	860/860	312	1076	14.5





**CRYSTAL**  
TIRE

BIAS OTR





# L-3 NEW



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
20.5/70-16	14	L-3 NEW	TT	10.00	1600	390	353	915	16
16/70-20	18	L-3 NEW	TT	13.00	3350	450	410	1075	25
17.5-25	20	L-3 NEW	TT/TL	14.00	4250	400	445	1350	25
17.5-25	16	L-3 NEW	TT/TL	14.00	4250	300	445	1350	25
20.5-25	24	L-3 NEW	TT/TL	17.00	6700	400	520	1490	29
20.5-25	20	L-3 NEW	TT/TL	17.00	6000	325	520	1490	29
20.5-25	16	L-3 NEW	TT/TL	17.00	5450	275	520	1490	29
23.5-25	24	L-3 NEW	TT/TL	19.50	8000	350	595	1615	31
23.5-25	20	L-3 NEW	TT/TL	19.50	7300	300	595	1615	31
23.5-25	16	L-3 NEW	TT/TL	19.50	6150	225	595	1615	31
26.5-25	24	L-3 NEW	TT/TL	22.00/3.0	14000/9250	400/300	675	1750	35

# G2



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
13.00-24	14	G2	TT/TL	10.00	1600	390	353	915	16
14.00-24	18	G2	TT/TL	13.00	3350	450	410	1075	25
15.5-25	16	G2	TT/TL	12.00/1.3	3130	300	395	1275	24
17.5-25	24	G2	TT/TL	19.50	8000	350	595	1615	31





# E-3/L-3



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
12.00-16	12	E-3/L-3	TT/TL	8.50	1245	390	244	884	20
14/90-16	16	E-3/L-3	TT/TL	8.5H	1245	290	215	896	16
16/70-20	18	E-3/L-3	TT/TL	13.0	3350	450	410	1075	25
14.00-24	16	E-3/L-3	TT/TL	10.0	4000	375	375	1370	24
14.00-24	20	E-3/L-3	TT/TL	10.0	4625	475	375	1370	24
14.00-24	24	E-3/L-3	TT/TL	10.0	5150	575	375	1370	24
16.00-24	16	E-3/L-3	TT/TL	11.25	4875	325	430	1490	26
16.00-24	20	E-3/L-3	TT/TL	11.25	5450	400	430	1490	26
16.00-24	24	E-3/L-3	TT/TL	11.25	6000	475	430	1490	26
16/70-24	14	E-3/L-3	TT/TL	133.0	3375	350	410	1175	25
18.00-24	32	E-3/L-3	TT/TL	13.0	1500	750	495	1615	28
15.5-25	12	E-3/L-3	TT/TL	12.0	3250	250	395	1275	24
16.00-25	32	E-3/L-3	TT/TL	11.25	12500	875	430	1490	26
17.5-25	16	E-3/L-3	TT/TL	14.0	4250	300	445	1350	25
17.5-25	20	E-3/L-3	TT/TL	14.0	4250	400	445	1350	25
18.00-25	36	E-3/L-3	TT/TL	13.0	16000	850	495	1615	28
20.5-25	16	E-3/L-3	TT/TL	17.0	5450	275	520	1490	29
20.5-25	20	E-3/L-3	TT/TL	17.0	6000	325	520	1490	29
20.5-25	24	E-3/L-3	TT/TL	17.0	6700	400	520	1490	29
23.5-25	16	E-3/L-3	TT/TL	19.5	6150	225	595	1615	31
23.5-25	20	E-3/L-3	TT/TL	19.5	7300	300	595	1615	31
23.5-25	24	E-3/L-3	TT/TL	19.5	8000	350	595	1615	31
26.5-25	24	E-3/L-3	TT/TL	22.0	8250	250	645	1743	35
26.5-25	28	E-3/L-3	TT/TL	22.0	9250	300	645	1743	35
26.5-25	32	E-3/L-3	TT/TL	22.0	10000	350	645	1743	35
29.5-25	28	E-3/L-3	TT/TL	25.0	11500	325	710	1840	36
7.50-16	8	E-3/L-3	TT/TL	6.00G	1900	500	215	810	20
8.25-16	10	E-3/L-3	TT/TL	6.50H	1800	550	235	865	20
20.5/70-16	12	E-3/L-3	TT/TL	10.00G	2185/1890	300/250	480	1070	25



# SH-278



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
5.00-8	10	SH278	/	3.50D	1290	100	137	470	10
6.00-9	10	SH278	/	4.00E	1680	860	160	540	11.5
7.00-9	10	SH278	/	5.00S	2145	850	190	590	13
6.50-10	10	SH278	/	5.00S	2170	510	175	510	13.5
7.00-12	12	SH278	/	5.00S	2720	860	190	676	15
8.25-12	12	SH278	/	7.00	2850	790	235	696	15
28*9-15	12	SH278	/	7.00	3035	700	230	700	17
7.50-15	12	SH278	/	6.00	2650	790	215	808	15
8.25-15	14	SH278	/	6.50	3700	800	235	840	17
7.00-15	12	SH278	/	5.50	2870	860	200	750	15



# R4



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
16.9-24	10	R4	TL	W15L	2230	200	430	1335	/
17.5L-24	8	R4	TL	W15L	1500	150	445	1265	/
19.5L-24	10	R4	TL	DW16	1925	170	495	1340	/
21L-24	10	R4	TL	DW18	2090	150	533	1400	/
16.9-28	10	R4	TL	W15L	2380	200	430	1435	/
18.4-26	12	R4	TL	DW16	4000	250	467	1450	/





# R4-1



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
10.5/80-18	10	R4-1	TL	9.00	1935	370	279	875	/
12.5/80-18	12	R4-1	TL	9.00	2625	370	317	940	/



# L2



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
10-16.5	8	L2	TL	8.25	1880	410	264	770	21
12-16.5	10	L2	TL	9.75	2540	450	307	840	21
14-17.5	14	L2	TL	10.50	3875	550	350	920	22
15-19.5	14	L2	TL	11.75	4565	480	390	1020	22





# SH-308



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
14.00-20	18	SH-308	/	10.00	3270	425	330	1215	9



# SH-338



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
14.00-20	18	SH-338	/	10.00	3270	425	330	1215	9





# R1



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
4.00-8	6	R1	/	3.00D	260	360	110	425	13
5.00-12	4	R1	/	4.00E	280	200	145	590	15
6.00-12	6	R1	/	4.50E	450	330	165	640	20
5.50-13	8	R1	/	4.00E	280	345	145	610	15
10.0/75-15.3	10	R1	/	9.00	1525	390	264	760	28.5
6.00-16	6	R1	/	4.50E	495	250	165	745	19
7.50-16	6	R1	/	5.50F	450	210	205	810	21
5.50-17	6	R1	/	4.00E	780	520	140	750	18
7.50-20	6	R1	/	5.50F	760	210	205	910	21
8.30-20	6	R1	/	W7	705	230	210	895	24
9.50-20	8	R1	/	W8	955	280	240	1050	25
16/70-20	12	R1	/	14.00	3288	290	406	1075	32
11.2-24	8	R1	/	W10	1225	240	285	1105	26
12.4-24	8	R1	/	W11	1415	230	315	1160	29
13.6-24	10	R1	/	W12	1790	250	345	1210	30
14.9-24	8	R1	/	W15L	1530	179	378	1265	22
15-24	10	R1	/	W14	2800	280	400	1310	32
16.9-24	10	R1	/	W15L	2230	200	430	1335	33
8.30-24	6	R1	/	W7	810	240	210	995	24
9.50-24	8	R1	/	W8	1110	280	240	1050	25
14.9-26	6	R1	/	W13	1560	140	378	1315	32
18.4-26	10	R1	/	DW16	2645	180	467	1450	35
23.1-26	10	R1	/	DW20	3245	140	554	1542	36
11.2-28	10	R1	/	W10	1490	310	285	1205	28
12.4-28	8	R1	/	W11	1510	230	315	1260	29
13.6-28	8	R1	/	W12	1645	200	345	1310	31
14.9-28	8	R1	/	W13	1800	180	378	1365	34
16.9-28	10	R1	/	W15L	2380	200	430	1435	35
14.9-30	6	R1	/	W13	1665	140	378	1415	32
16.9-30	10	R1	/	W15L	2455	200	447	1499	36
18.4-30	10	R1	/	W16L	2815	180	467	1550	36
11-32	10	R1	/	W10	1460	250	305	1360	28
16.9-34	10	R1	/	W15L	2605	200	429	1585	36
18.4-34	10	R1	/	W16L	2990	180	467	1655	36
11.2-38	10	R1	/	10.00	1180	221	284	1448	32
12-38	8	R1	/	11.00	1570	140	298	1563	35
13.6-38	10	R1	/	W12	2215	250	328	1548	34
15.5-38	10	R1	/	W14L	1760	207	391	1549	34
16.9-38	10	R1	/	W15L	2760	200	464	1685	36
18.4-38	10	R1	/	W16L	3165	180	467	1755	37
20.8-38	12	R1	/	W18L	4000	200	528	1835	38
18.4-42	10	R1	/	W16	3330	180	467	1857	35





# SH-358

SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
12.00-20	12	SH-358	/	8.50	4750	580	290	1150	15




# SH-378

SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
14.00-20	18	SH-378	/	10.00	3270	425	330	1215	9
16.00-20	18	SH-378	/	11.25	4800	400	430	1390	10





# L-5

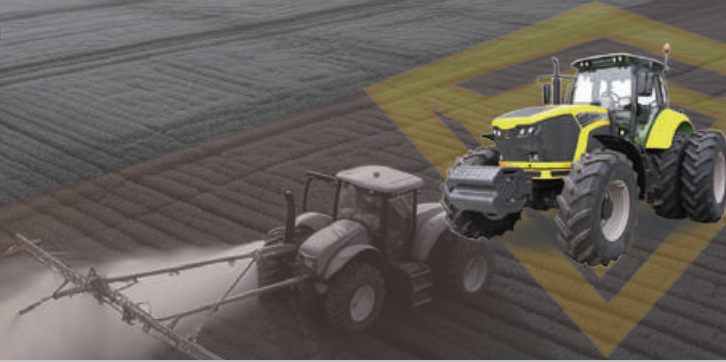

SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
17.5-25	16	L-5	/	14.0/1.50	7300	475	445	1400	60
20.5-25	20	L-5	/	17.0/2.00	9500	450	520	1550	66
23.5-25	20	L-5	/	19.5/2.50	10900	375	595	1675	72
26.5-25	28	L-5	/	22.0/3.00	15500	475	675	1800	82
29.5-25	28	L-5	/	25.0/3.50	17500	425	750	1920	90
29.5-25	32	L-5	/	25.0/3.50	19500	500	750	1920	90
20.5/70-16	14	L-5	/	10.006	1600	350	356	955	46
16/70-20	14	L-5	/	13(SDC)	5150/2900	450/350	410	1090	50
16/70-20	16	L-5	/	13(SDC)	5480/3150	500/400	410	1090	50



# F2



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
750-16	/	F2	/	5.50F	870	370	205	810	/
750-18	10	F2	/	5.50F	945	370	205	860	12
10.00-16	12	F2	/	W8L	1325	340	275	910	21
11.00-16	12	F2	/	W10L	1485	310	315	970	24





# F3



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
10.0/75-15.3	/	F3	/	9.00	1550	390	264	760	/
11.5/80-15.3	/	F3	/	9.00	2180	410	290	745	/

# SH628



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
400-8	/	SH628	/	3.000	225	275	112	415	/





L4



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
17.5-25	20	L4	/	14.00/1.5	8250/5000	575/400	445	1400	45



CS620+



SIZE	PR	PATTERN	TYPE	Speed Rating	STD.RIM	Max.Load(kg) Single/Dual	Inflation Pressure(kPa)	Inflated Section Width(mm)	Overall Diameter Inflated(mm)	Pattern Depth(mm)
14.00-20	20	CS620+	TT	-	10.0W	2360	245	375	1220	8





**CRYSTAL**  
TIRE

RADIAL OTR



[falesgrand.com](http://falesgrand.com)





# E-3/L-3



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
17.5R25	/	E-3/L-3	TL	14.00/1.50	8500	650	445	1348	27
20.5R25	/	E-3/L-3	TL	17.00/2.00	11500	650	521	1493	31



# L3



SIZE	PR	PATTERN	TYPE	STANDARD RIM	MAX LOAD (kg)	Inflation Pressure (kPa)	Inflation Section Width(mm)	Over Diameter (mm)	Pattern Depth (mm)
23.5R25	/	L3	TL	19.50/2.5	14500	650	597	1617	33
26.5R25	/	L3	TL	22.00/3.0	18500	650	673	1750	36
29.5R25	/	L3	TL	25.00/3.5	22400	650	749	1874	39